

WL-430G/T-W

3G/4G Wireless modem with 802.11n


Description:

WL-430G/T-W 3G/4G Wireless Modem can be widely applied to Oil & Gas, Coal-Mining, Iron & Steel, Water, New-Energy and other industrial system. Connected your PLC, VFD, DCS, instruments via the modem. 802.11n Mode is supported so that engineer can get the production data by their iPad or mobile phone where the area is covered by Wi-Fi signal.

WL-430G/T series support the latest 4G/3G high-speed wireless cellular technologies; Supports dynamic or static IP addressed assigned by cell carriers. VPN Client and DDNS Client has been designed for the module, PLC program can be uploaded/downloaded at anyplace. This enables configuration, programming or debugging of almost any industrial device from any location. Whether you're using a GPRS, 3G, EDGE, HSDPA, HSUPA or LTE Connection, you can use your regular configuration software just as you would if you were on site. Allowing HMI, PLCs, sensors etc to communicate with each other. Remote Access removes boundaries, eliminates the need for time consuming site visit and provide a network infrastructure suitable for today's "always-on" society.

All interface and LEDs in the front and with the DIN-Rail in the back make the module well suited for the industry application. In order to protect against issues caused by ground loop, optical isolation was designed between the Ethernet port and serial port.



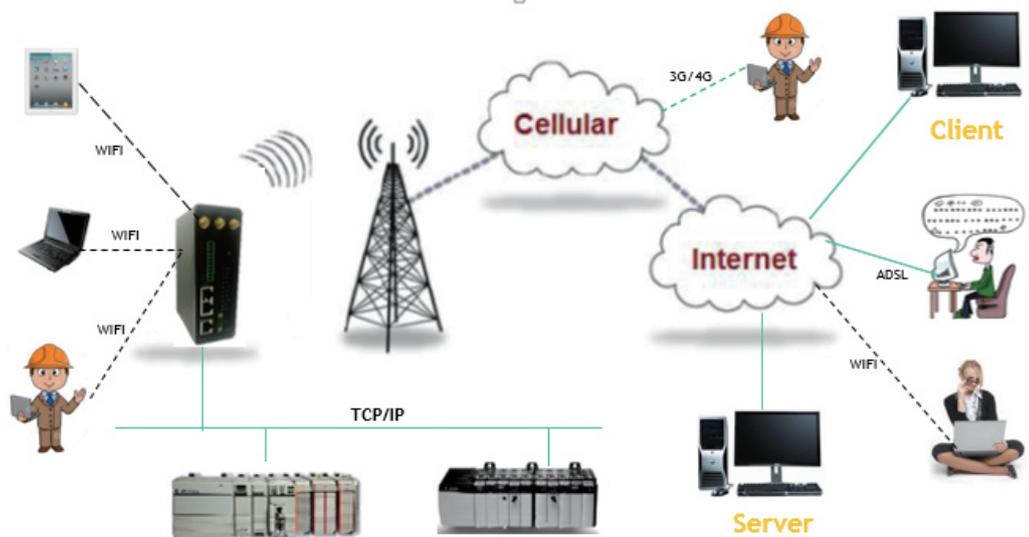

Features:

- Supported 2G/3G/4G network
- 2 port 10/100 Ethernet LAN switch with LAN / DMZ configurable zones
- 3G/4G module built-in
- Support Wi-Fi 802.11b/g/n
- WiVPN client w/DES, 3DES, AES
- Stateful Packet Inspection Firewall
- Supports dynamic or static IP addresses assigned by cellular carriers
- Support APN/VPDN network
- Support routing uncton, two Ethernet port can be used as one for WAN the another for LAN
- DHCP, DDNS, Port Forward and SNMP is supported
- It can be configured by webpage or CLI

Technical specifications:

3G/4G		
Compatible Mobile Networks	LTE, DC-HSPA+, HSPA+, HSDPA, HSUPA, WCDMA, GSM, GPRS, EDGE,	850/900/1900/2100
	EVDO,CDMA2000 1X	800/1900
	HSUPA/HSDPA/UMTS/EDGE/GPRS/GSM	
Band Width	LTE	UL/DL: 50Mbps/ 150Mbps
	HSDPA+(1)	UL/DL: 5.76Mbps/ 14.4Mbps
	HSDPA+(2)	UL/DL: 5.76Mbps/ 21Mbps
	EVDO(3G)	1.8Mbps/ 3.1Mbps

Wi-Fi	
Standard Frequency Band	Support IEEE 802.11 b/g/n wireless operation standard 2.4GHz (ISM Frequency Bands)
Mode	Master, Repeater , AP, Ethernet Bridge, Ad-hoc
VLAN	Support, ESSID
Security	64/128-bit WEP (Wired Equivalent Privacy) WPA & WPA-PSK & WPA2 -PSK (Wi-Fi Protected Access)
Transmit Power	20dBm
Data rates	MCS0 -MCS15
Receiver Sensitivity	-94dBm @ MCS0 & MCS8
Security	WPA2 & WPA Personal 802.11i AES, TKIP, WEP support
Others	
Advanced Firewall Features	Network Address Translation (NAT) State full Packet Inspection (SPI) Port Forward, Packets
Media Access Control	CSMA/CA with ACK
Network Function	WiVPN, DHCP, DNS, DDNS, ICMP, VLAN
Hardware Specifications	
Size	Width 1.6 inches x Height 5.3 inches x Depth 3.7 inches
Weight	1.2 lbs (543g)
Enclosure	Aluminum DIN-Rail
Interface	2xRJ45(10/100Mbps), 1xRS232, I/O Port(2xDI, 2xDO, 1xAI), 3x SMA, 1x RS485, 1x1.8V/3V SIM slot
Operation Temperature	-40°C - 70°C
Storage Temperature	-40°C - 85°C
Humidity	95% Maximum (Non-condensing)
Power	10-31VDC
Power consumption	Idle: 130mA@24VDC, Max: 250mA@24VDC Average: 160mA@12VDC